

Autel AC Ultra.


Productspecificaties





MaxiCharger AC Ultra

The Fastest AC Charger for Two Vehicles

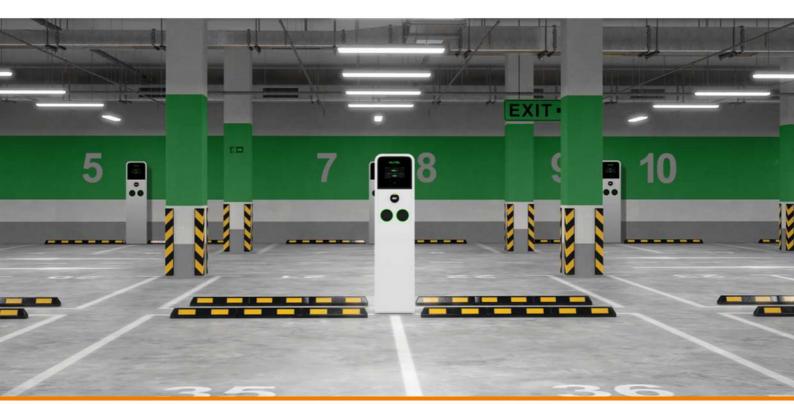



Fast and Efficient

Create an exceptional charging experience

- At 22kW per port this charger leads the industry by fast charging 2 vehicles simultaneously, and generates 140 km of range within 60 min
- Designed with ISO 15118 Plug & Charge, for a hassle-free charging experience



Best-value Design

Tailored for commercial deployment

- Rugged design allows it to be wall-mounted or floor-mounted to support your application needs
- One-piece construction makes it easy to install resulting in lower costs and a faster ROI



Smart Charging

Future-proof, flexible and improves your bottom-line

- Smart functionality with OCPP compliance, can adapt its power usage and provide optimal charging today and into the future
- Reduce capital investment in power capacity

The big value behind the MaxiCharger AC Ultra



One-piece Pedestal Housing Combination



WiFi Hotspot Sharing



Power Sharing



8-inch HD Advertising Screen



APP, RFID Card, Credit Card, Mobile Payment



One-Stop Cloud Network Management



OCPP Compliance



Weather Resistant



Charging Cable Can Be Permanently Locked





Technical Specifications

Product Information

Mode 3 Charging mode

Three phase up to 2*22kW/32A Input/output power rating and current Input/output voltage 400V±15%, three phase; 50Hz

(UK: 400V±15%, three phase; 50Hz)

TT, TN, IT Network type

Connector type IEC 62196 Type 2 Socket or Socket with shutter

AC 30mA + DC 6mA Residual current detection

Protection Overcurrent, overvoltage, undervoltage, integrated surge protection,

PME (UK)

ISO 15693, ISO 14443 Card reader

Power measurement accuracy +/- 1.0%; Build-in MID Certified meter

General Characteristics

IP and IK rating IP54: IK10 2000m Operating altitude -40°C ~ +55°C Operating temperature range Storage temperature range -40°C ~ +85°C

Wall or floor using a pedestal Mounting

Dimensions (H×W×D) 625 × 320 × 170 mm

User Interface

Status indication LED/APP/LCD (8 inch touch screen, 1280*720) Autel

User interface Charge APP; Autel Charge Cloud

Bluetooth, Wi-Fi, Ethernet, 4G, CAN, RS485 Connectivity

Communication protocols OCPP 1.6J (Can be upgraded to OCPP 2.0.1 later)

APP, RFID card, Credit Cards (Optional) User authentication

Software Update OTA updates via web portal

Certification and Standards

IEC 61851-1, IEC 62311, IEC 62479, IEC 62955 Safety and compliance

Certification CE (TUV), Eichrechtskonform (Optional) 36 months, warranty extension possible Warranty



Orange Charging B.V.

Phone: +31(0)85 105 47 50 ■ E-mail: info@orangecharging.com

Website: orangecharging.com









Orange Charging

^{*} All pictures shown are for illustration purpose only, actual product and specifications may vary due to product enhancement